neolt factory

XYmatic trimplus

XYmatic trimplus

neolt factory

MAIN FEATURES

- LCD Touch Screen display with intuitive and easy-to-use software
- Auto-alignment
- Double sensor to read cross-marks
- Adjustable speed X & Y axis
- Excellent cutting area visibility
- Pneumatic Pinch Roll with silent compressor inside the machine
- Automatic waste collecting system
- Plug & Play
- Up to 10 pneumatic vertical cutting units
- Double load reel
- Tower Light
- New alignment system of vertical cutting units
- Open cutting units (no paper jam)
- Monolithic machine structure
- Standard loading jumbo Roll 300mt
- Up to 20 customizable memories

OPTIONAL

- Single cutting unit (max 10)
- Central twin cutting unit
- Laser ray for vertical cut
- Table for copies collection

MATERIALS

- Paper (laminated or en-capsulated)
- Wallpaper
- Canvas & Polyester (with liner)
- Reflective material
- PVC banner
- Vinyl & Vinyl sticker
- Display backlit & frontlit
- Magnetic rubber
- Polycarbonate in film

XYmatic trimplus

neolt factory

Sensor to read cross-marks

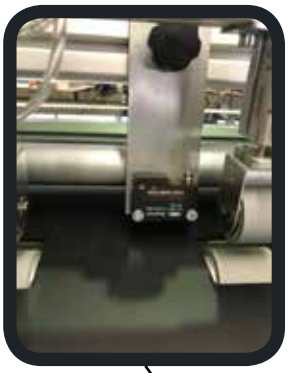

Laser ray for vertical cut (optional)

Intuitive and easy-to-use software

Tower Light

LCD Touch Screen Display

Pneumatic Pinch Roll

Silent compressor inside the machine

Double central cutting units (optional)

Pneumatic vertical cutting units



Table for copies collection (optional)

TECHNICAL INFO	XY MATIC TRIM PLUS
Width	1650
Cutting thickness	1,2 mm max
Speed Advancement	1-50 m/minute
Cutting unit max	10 vertical unit
Horizontal cutting speed	1-150 m/minute
Power supply	230V - 50Hz - 650W
Dimensions	L515 x H1350 x P660
Weight	Kg 400

NeoltFactory srl
Headquarters: Via Italia, 6 - 24030
Valbrembo (Bergamo) ITALY
Tel: 035468811 Fax: 035468886
www.neoltfactory.com

You can also find us on the bigger social